



SM-T20A LED Street Light

Product Description

SM-T20A LED Street Light is better than normal LED lights for its large number light sources. Which can be different with specific model and enables different light intensity. Also, with the help of its advanced chip, the speed of it to emit light would be much better than other LED street lights in the market. And the color rendering index of SM-T20A LED Street Light is higher than many other lights, helping drivers to identify the different signs correctly and reduce the incidence of traffic accidents effectively. What's more, SM-T20A LED Street Light is competitive for its outstanding working ability against harsh environments such as heavy rain, low temperature, and so on.

SM-T20A LED Street Light Features

1. IP65 driver box and optional photocell,
2. Modular pluggable technology, tool-free onsite maintenance,
3. Honeycomb and whole structure cooling technology, high efficient heat dissipation,
4. Double-coupling IP68 protection, highest waterproof level,
5. Intelligent constant current driving technology, long life span,
6. Ergonomic light distribution to achieve uniform illuminating effect,
7. Free modular serialization and full power range solutions,
8. Die-cast and aluminum alloy housing



Zhejiang Seming Electronic Co., Ltd

Detailed Parameters

Input Voltage	Power Efficiency	Power Factor	Junction Temperature	CRI	Working Environment	Storage Temperature			
AC100V-277V	91%	0.95	< 80°C	Ra ≥ 70	-40 °C ~+50 °C 10%~90%RH	-40 °C ~+50 °C			
LED Life span	Surge Protection	CCT	LED Brand	Installation Diameter	Material	IP Rating			
>60000Hours	10KV/5KA	3000K, 4000K, 5000K, 5700K	Lumileds	57~63mm	Metal	LED Module IP68, Driver Box IP65			
Model	System Power	LM/W (Ultra High)	LM/W (High)	Initial Lumen (Ultra High)	Initial Lumen (High)	Product Size (mm)	Packaging dimension (mm)	N.W. (Kg)	G.W. (Kg)

Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265; Email: sales@seminglighting.com**



Zhejiang Seming Electronic Co., Ltd

SM-T20A-1	40	155	115	6200	4600	670*325* 180	760*410* 210	8.0	9.6
	50	150	110	7500	5500	670*325* 180	760*410* 210	8.0	9.6
	60	145	105	8700	6300	670*325* 180	760*410* 210	8.0	9.6
SM-T20A-2	80	160	120	12800	9600	670*325* 180	760*410* 210	8.7	10.4
	100	155	115	15500	11500	670*325* 180	760*410* 210	8.7	10.4
	120	150	110	18000	13200	670*325* 180	760*410* 210	8.7	10.4
SM-T20A-3	120	160	120	19200	14400	750*325* 180	840*410* 210	9.9	11.7
	150	155	115	23250	17250	750*325* 180	840*410* 210	9.9	11.7
	180	150	110	27000	19800	750*325* 180	840*410* 210	9.9	11.7
SM-T20A-4	160	160	120	25600	19200	830*325* 180	920*410* 210	11.5	13.4
	200	155	115	31000	23000	830*325*	920*410*	11.5	13.4

Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265; Email: sales@seminglighting.com**



Zhejiang Seming Electronic Co., Ltd


						180	210		
	240	150	110	36000	26400	830*325*	920*410*	11.5	13.4
						180	210		
SM-T20A-5	200	160	120	32000	24000	910*325*	1000*410	13.0	15.1
						180	*230		
	250	155	115	38750	28750	910*325*	1000*410	13.0	15.1
						180	*230		
	300	150	110	45000	33000	910*325*	1000*410	13.0	15.1
						180	*230		

Product Display




RoHS



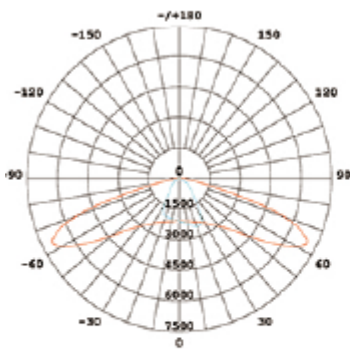


T1S3501

IESNA Type I Short

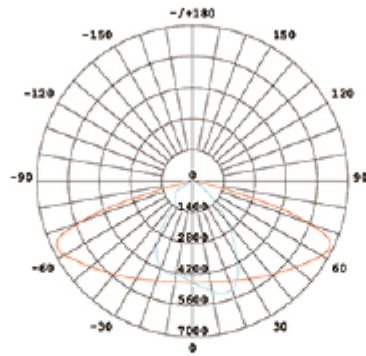


T1S3100

IESNA Type I Short

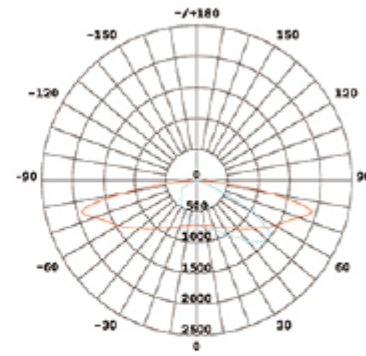


T3M3910

IESNA Type III Medium




T2M3702

IESNA Type II Medium




T3M2701

IESNA Type III Medium



T4M5703

IESNA Type IV Medium



T5S3040

IESNA Type VS Short

Application



Zhejiang Seming Electronic Co., Ltd



Address: Haicheng Road, Baiguan Industrial District, Shangyu Area, Shaoxing City, Zhejiang province, China; Tel: +861 8267537265, **WhatsApp: +8618267537265; Email: sales@seminglighting.com**